

DATASHEET ALTERNATOR

Alternator ref. KH01741T
Alternator type KH01741TN4N



-GENERAL CHARACTERISTICS-

Voltage Type (V) 400/230 Altitude (m) 0-1000
Number of Phase Three phase AVR Regulation Yes
Number of pole 4 Indication of protection IP23

Capacity for maintaining short circuit at 3 In for 10 s No
Winding type Standard

Efficiency & Power

Frequency (Hz) 50 Hz Nominal voltage (V) 400

	Class H				Class F	Class B
	125°C/ 40°C continuous	130°C/ 25°C standby	150°C/ 40°C standby	163°C/ 27°C standby	105°C/ 40°C continuous	80°C/ 40°C continuous
Nominal Rating(Kva)	400	400	420	440	360	320
Nominal Rating(KW)	320	320	336	352	288	256
Efficiency 100%	93.1	93.1	92.9	92.8	93.4	93.7

-ELECTRICAL CHARACTERISTICS-

Voltage regulation at established rating (+/- %) 0.5
Insulation class H
T° class (H/125°), continuous 40°C H / 125°K
T° class (H/163°C), standby 27°C H / 163°K
Wave form : NEMA=TIF <50
Unbalanced load acceptance ratio (%) 70
Number of wires 12
Total Harmonic Distortion in no-load DHT (%) <2
Wave form : CEI=FHT <2
Total Harmonic Distortion, on linear load DHT (%) <2
Technology Without collar or brush
L-L Harmonic Maximum - Single (%) 18
Deviation Factor (%) 3
Shaft Current
Main Stator Capacitance to ground (mfd)

Reactances

Direct axis synchro reactance unsaturated (Xd) (%) 393
Direct axis transient reactance saturated (X'd) (%) 22.1
Direct axis subtransient reactance saturated (X''d) (%) 15.5
Quadra axis synchro reactance unsaturated (Xq) (%) 200
Quadra axis subtransient reactance saturated (X''q) (%) 20.9
Zero sequence reactance unsaturated (Xo) (%) 0.9
Negative sequence reactance saturated (X2) (%) 18.26

Short circuit ratio

Short circuit ratio (Kcc) 0.294
Subtransient time constant (T''d) (ms) 10

3.351411E+10-A

The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever

DATASHEET ALTERNATOR

Alternator ref. KH01741T
Alternator type KH01741TN4N

KOHLER[®]

Short circuit transient time constant (T'd) (ms)	100
Open circuit time constant (T'do) (ms)	1771
Subtransient time constant (T''q) (ms)	10
Leakage stator reactance (Xa)(%)	1.1
Stator Resistance (Ra)(%)	0.021
Armature time constant (Ta) (ms)	15
No load excitation current (io) (A)	0.85
Full load excitation current (ic) (A)	3.92
Full load excitation voltage (uc) (V)	67.1
Heat rejection (W)	23478.15
No load losses (W)	5158.09
Stator resistance (for 20°C ambient) (Ω)	0.00844
Rotor resistance (for 20°C ambient) (Ω)	0.79243
Exciter resistance - stator/inductor (for 20° ambient) (Ω)	17.404
Exciter resistance - rotor/armature (for 20° ambient) (Ω)	0.128
Recovery time (Delta U = 20% transient) (ms)	500
Engine start (Delta U = 20% perm. or 30% trans.) (kVA)	571.36
Transient dip (4/4 load) - PF : 0,8 AR (%)	19

Additional electrical characteristics-

Winding X1, X2 auxiliary resistance (for 20° ambient) (Ω)	0
Auxiliary winding X1, X2 excitation voltage at no load (V)	0
Auxiliary winding X1, X2 excitation voltage on load (V)	
Winding Z1, Z2 auxiliary resistance (for 20° ambient) (Ω)	0
Auxiliary winding Z1, Z2 excitation voltage at no load (V)	0
Auxiliary winding Z1, Z2 excitation voltage on load (V)	

-MECHANICAL CHARACTERISTICS-

Number of bearing	1
Overspeed (rpm)	2250
Coupling	Direct


DATASHEET ALTERNATOR

Alternator ref. KH01741T
Alternator type KH01741TN4N




-TECHNICAL CURVES-

Motor starting curve locked rotor (0,6PF)

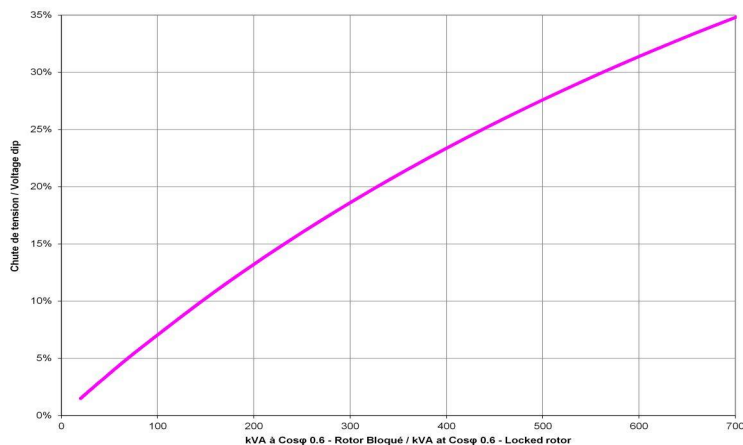

Motor starting curve locked rotor (0,3PF)

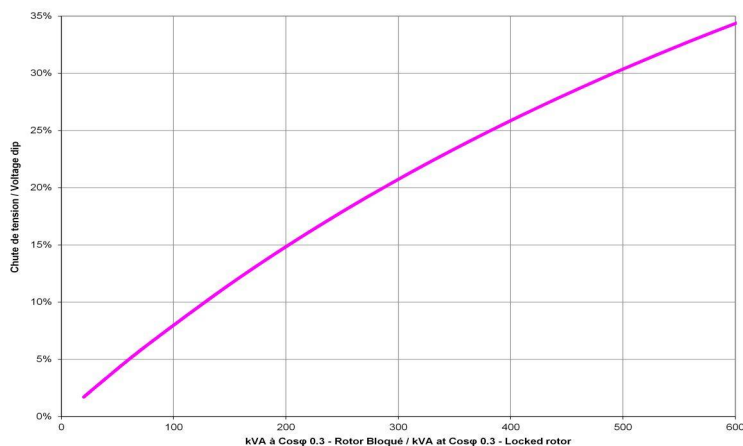


DATASHEET ALTERNATOR


Alternator ref. KH01741T
Alternator type KH01741TN4N



Efficiencies curve (by excitation system)

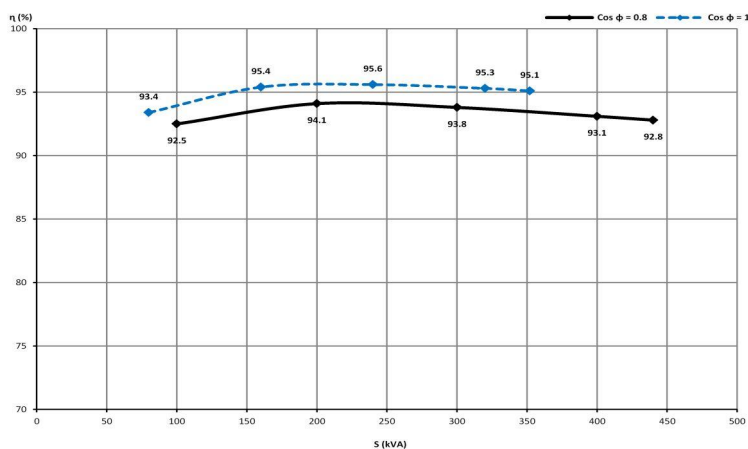

Loading curve (by excitation system)

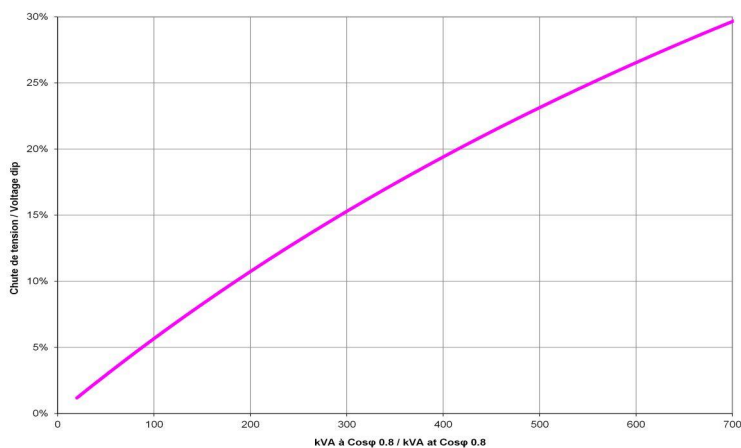

DATASHEET ALTERNATOR

Alternator ref. KH01741T
Alternator type KH01741TN4N

KOHLER[®]

Short circuit curve at no load and rated speed

Influence due to connection

Curves shown are for star (Y) connection

For other connections, use the following multiplication factors :

- Series delta : current value x 1.732
- Parallel star : current value x 2

Influence due to short-circuit

Curves are based on a three-phase short-circuit. For the other types of short-circuit, use the following multiplication factors :


(*) Capacity for maintaining short circuit at $3 I_n$ for 10 s = YES

DATASHEET ALTERNATOR


Alternator ref. KH01741T
Alternator type KH01741TN4N



Rejection curve (by excitation system)

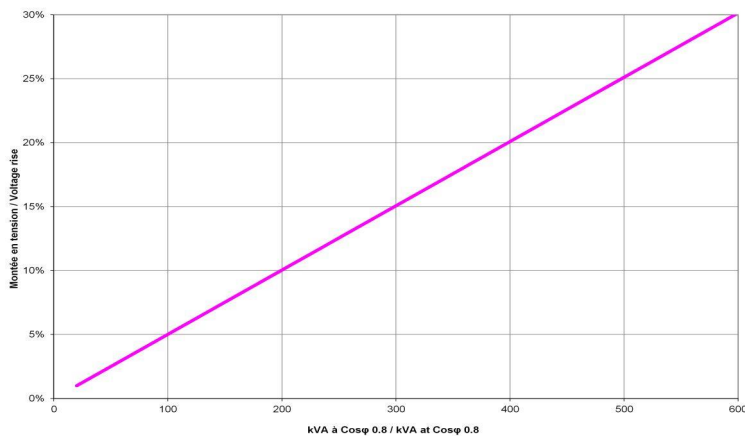

Capability curve (PQ diagram)

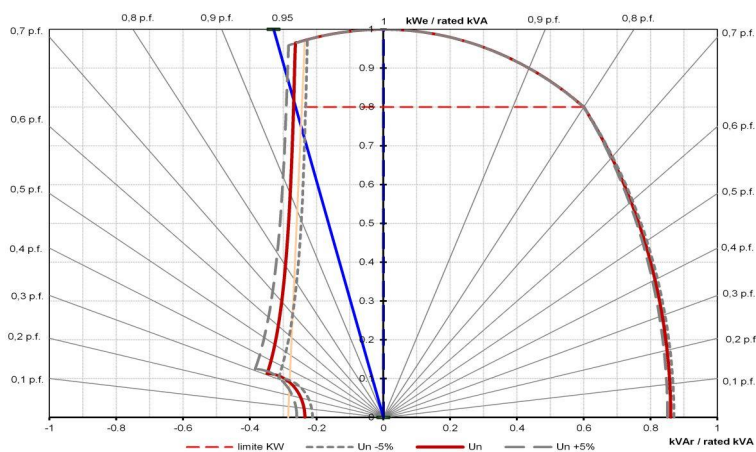


DATASHEET ALTERNATOR

Alternator ref. KH01741T
 Alternator type KH01741TN4N



DIMENSIONS-

Overall dimension drawing (Single bearing)

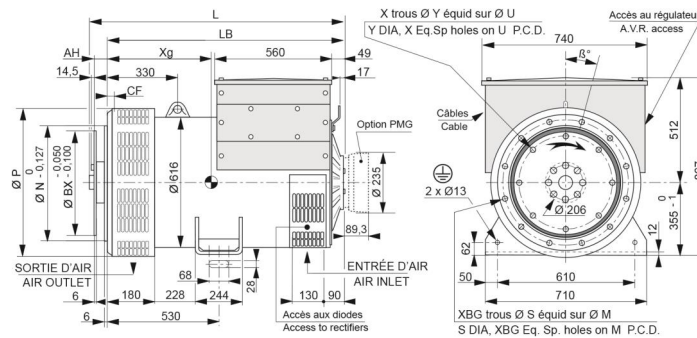

Dimensions (mm)					Accouplement / Coupling				
Type	L sans/without PMG	LB	Xg	Masse/Weight (kg)	Disque/Flex plate	11	1/2	14	18
ALT -KH01630	1041	996	437	976	Bride/Flange S.A.E 1	X	X		
ALT -KH01741	1101	1056	471	1113	Bride/Flange S.A.E 1/2		X		
ALT -KH02070	1101	1056	471	1113	Bride/Flange S.A.E 0			X	X
ALT -KH02450	1201	1156	511	1240					
ALT -KH02610	1201	1156	520	1289					
ALT -KH02880	1221	1176	545	1372					


Bride / Flange (mm)							Disque / Flex plate (mm)						
S.A.E.	P	N	M	XBG	S	β°	CF	S.A.E.	BX	U	X	Y	AH
1	713	511.175	530.225	12	12	15°	15	11 1/2	352.42	333.38	8	11	39.6
1/2	713	584.2	619.125	12	14	15°	22	14	466.72	438.15	8	14	25.4
0	713	647.7	679.45	16	14	11° 15'	42	18	571.5	542.92	6	17	15.7

DATASHEET ALTERNATOR

Alternator ref. KH01741T
 Alternator type KH01741TN4N



Overall dimension drawing (Two bearings)

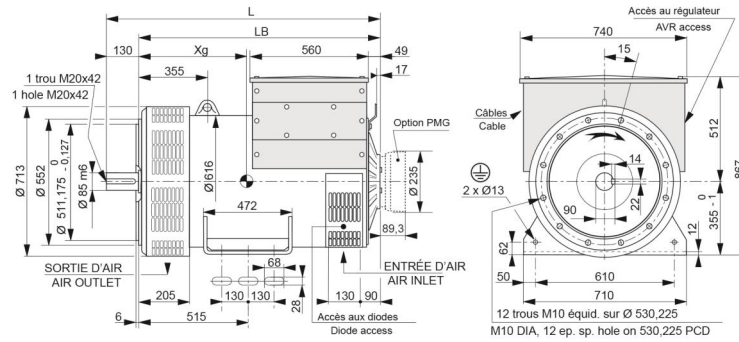

Dimensions (mm)				
Type	L sans / without PMG	LB	Xg	Masse / Weight (kg)
ALT -KH01630	1151	1021	457	996
ALT -KH01741	1211	1081	491	1126
ALT -KH02070	1211	1081	491	1126
ALT -KH02450	1311	1181	531	1253
ALT -KH02810	1311	1181	531	1302
ALT -KH02880	1331	1201	565	1392


DATASHEET ALTERNATOR

Alternator ref. KH01741T
 Alternator type KH01741TN4N



-TORSIONAL ANALYSIS DATA-

Rotation part drawing for torsional vibration calculation (Single bearing)

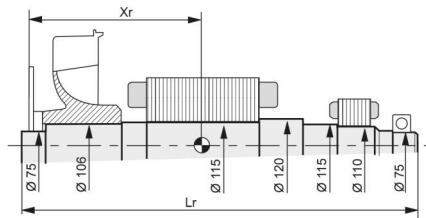


Centre de gravité : Xr (mm), Longueur du rotor Lr (mm), Masse : M (kg), Moment d'inertie : J (kgm ²) : (4J = MD ²) Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm ²): (4J = MD ²)												
Type	Disque/Flex plate S.A.E. 11 1/2				Disque/Flex plate S.A.E. 14				Disque/Flex plate S.A.E. 18			
	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J
ALT-KH01630	432.5	1029	387	5.99	418.3	1029	387	6.12	408.5	1029	387	6.38
ALT-KH01741	470	1089	442	6.90	456	1089	442	7.03	446	1089	442	7.29
ALT-KH02070	470	1089	442	6.90	456	1089	442	7.03	446	1089	442	7.29
ALT-KH02450	510	1189	495	7.61	496	1189	495	7.74	486	1189	495	8
ALT-KH02610	521	1189	514	8.01	507	1189	514	8.14	497	1189	514	8.40
ALT-KH02880	542	1209	547	8.52	528	1209	547	8.65	518	1209	547	8.91

DATASHEET ALTERNATOR

Alternator ref. KH01741T
 Alternator type KH01741TN4N



Rotation part drawing for torsional vibration calculation (Two bearings)

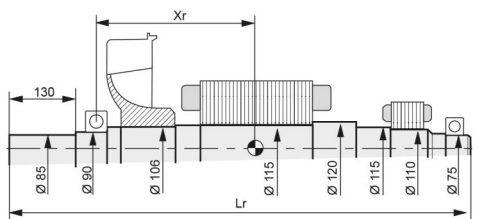

Centre de gravité : Xr (mm), Longueur du rotor Lr (mm), Masse : M (kg), Moment d'inertie : J (kgm ²) : (4J = MD ²)												
Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm ²): (4J = MD ²)												
Type	Disque/Flex plate S.A.E. 11 1/2				Disque/Flex plate S.A.E. 14				Disque/Flex plate S.A.E. 18			
	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J
ALT -KH01630	432.5	1029	387	5.99	418.3	1029	387	6.12	408.5	1029	387	6.38
ALT -KH01741	470	1089	442	6.90	456	1089	442	7.03	446	1089	442	7.29
ALT -KH02070	470	1089	442	6.90	456	1089	442	7.03	446	1089	442	7.29
ALT -KH02450	510	1189	495	7.61	496	1189	495	7.74	486	1189	495	8
ALT -KH02610	521	1189	514	8.01	507	1189	514	8.14	497	1189	514	8.40
ALT -KH02880	542	1209	547	8.52	528	1209	547	8.65	518	1209	547	8.91