
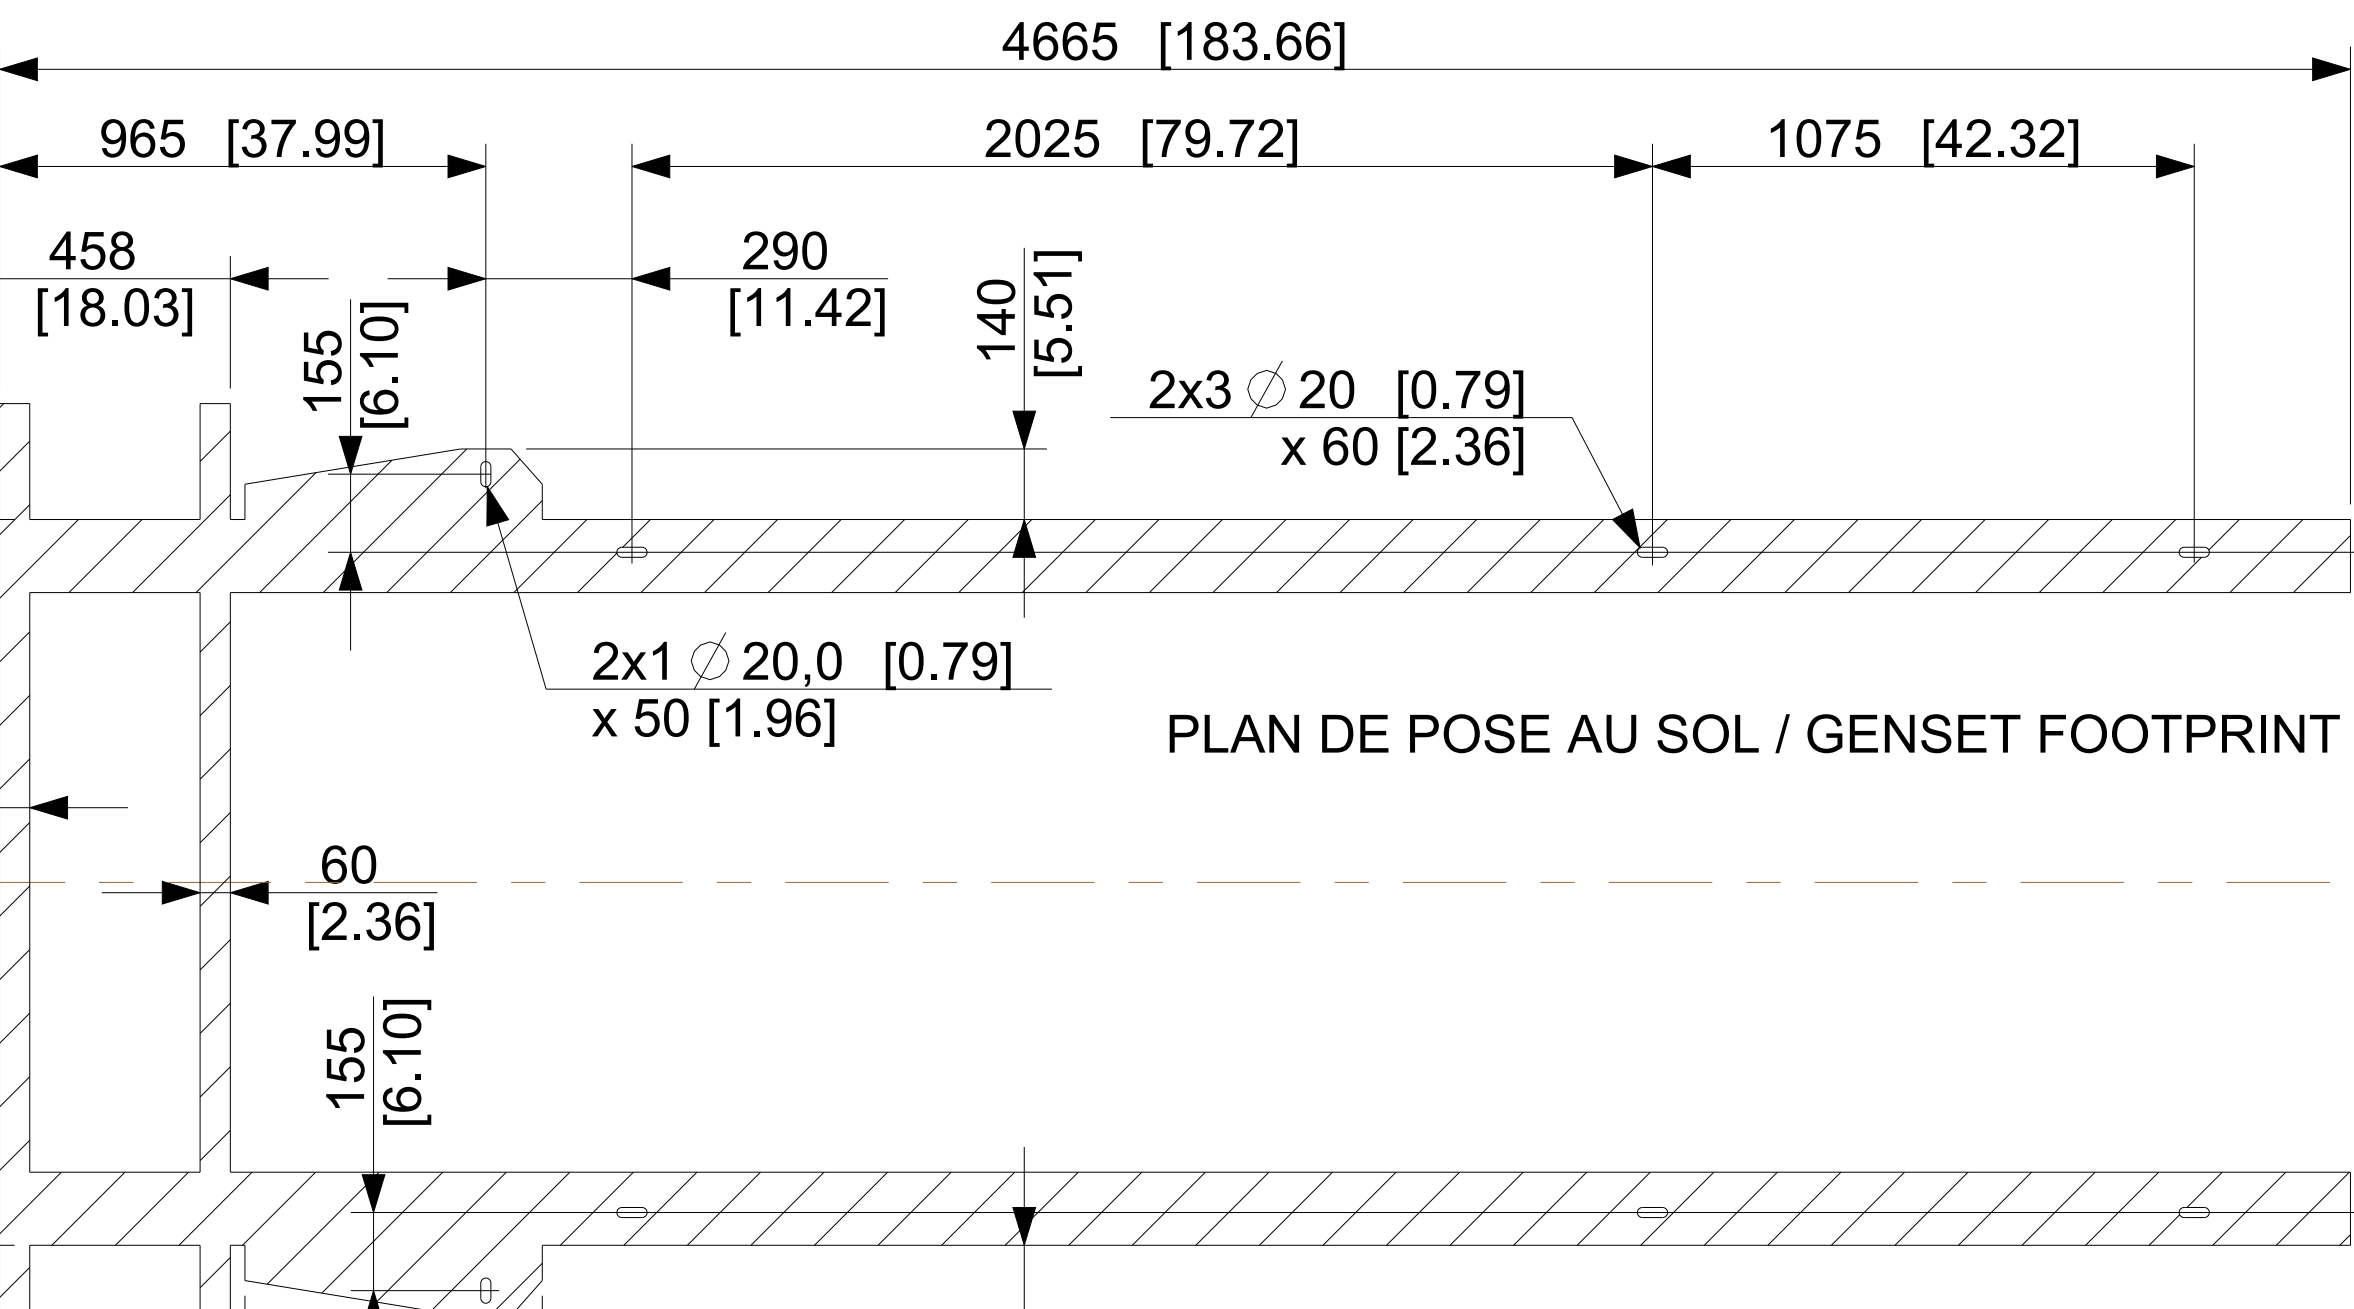
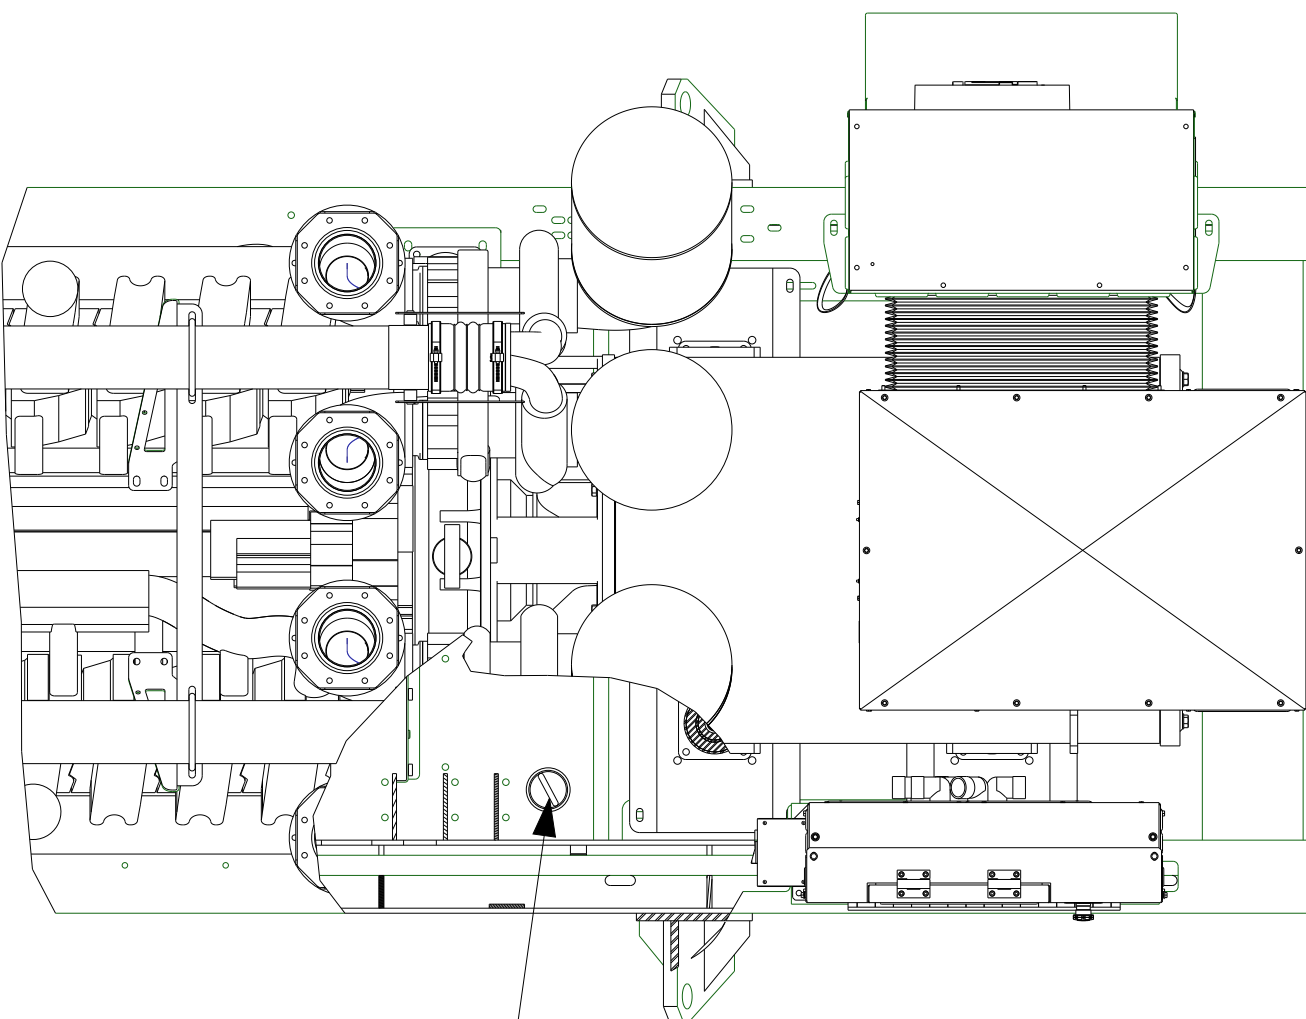
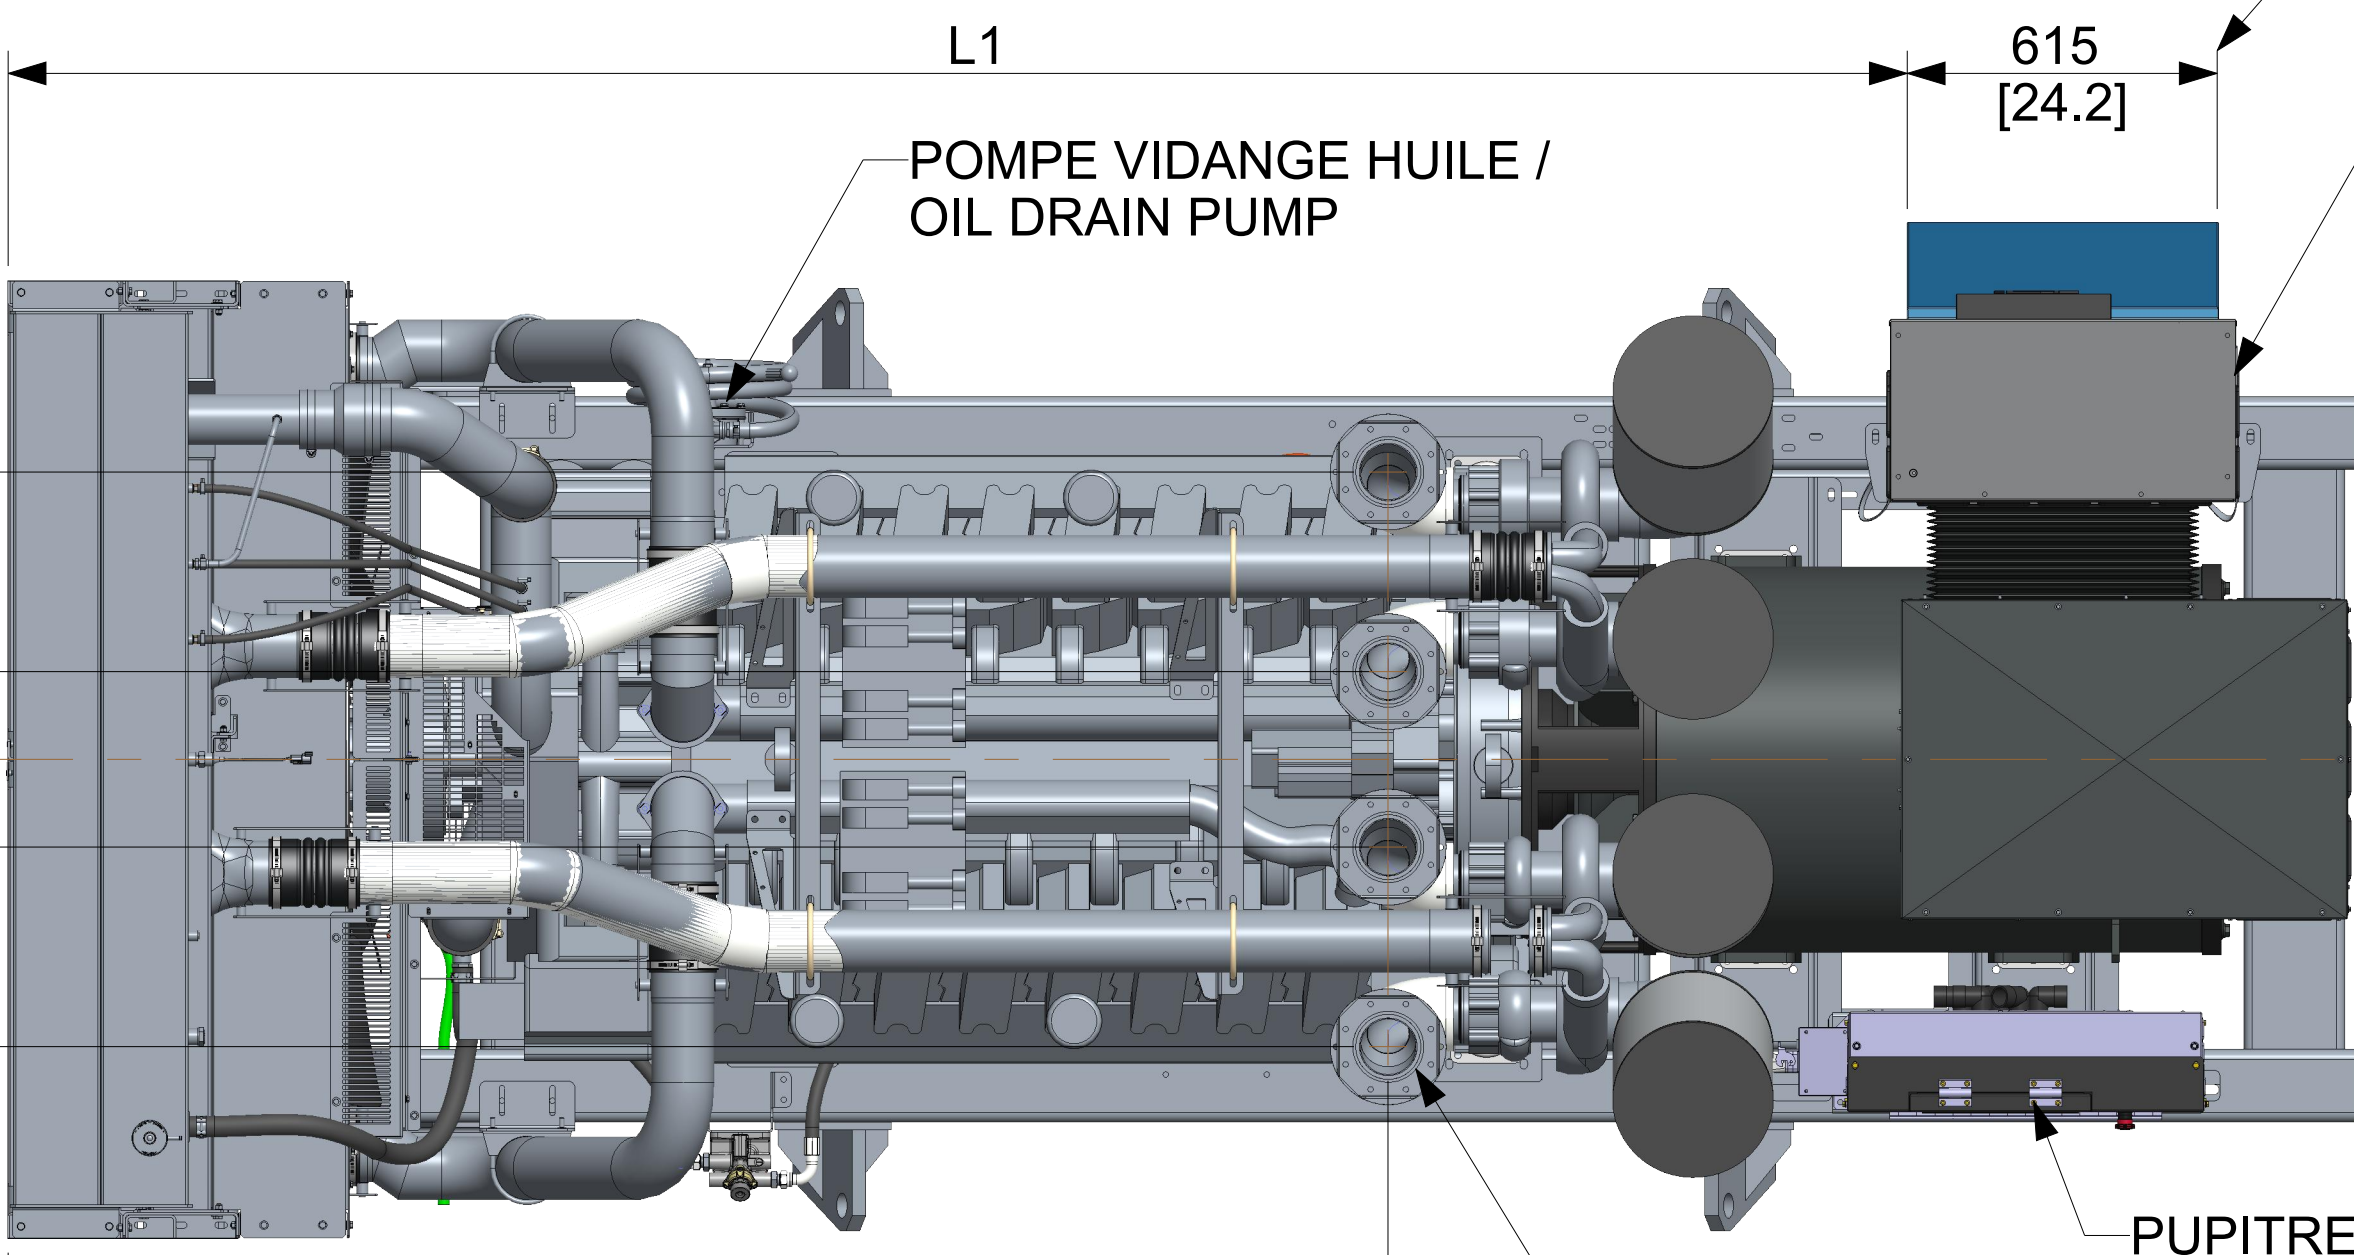
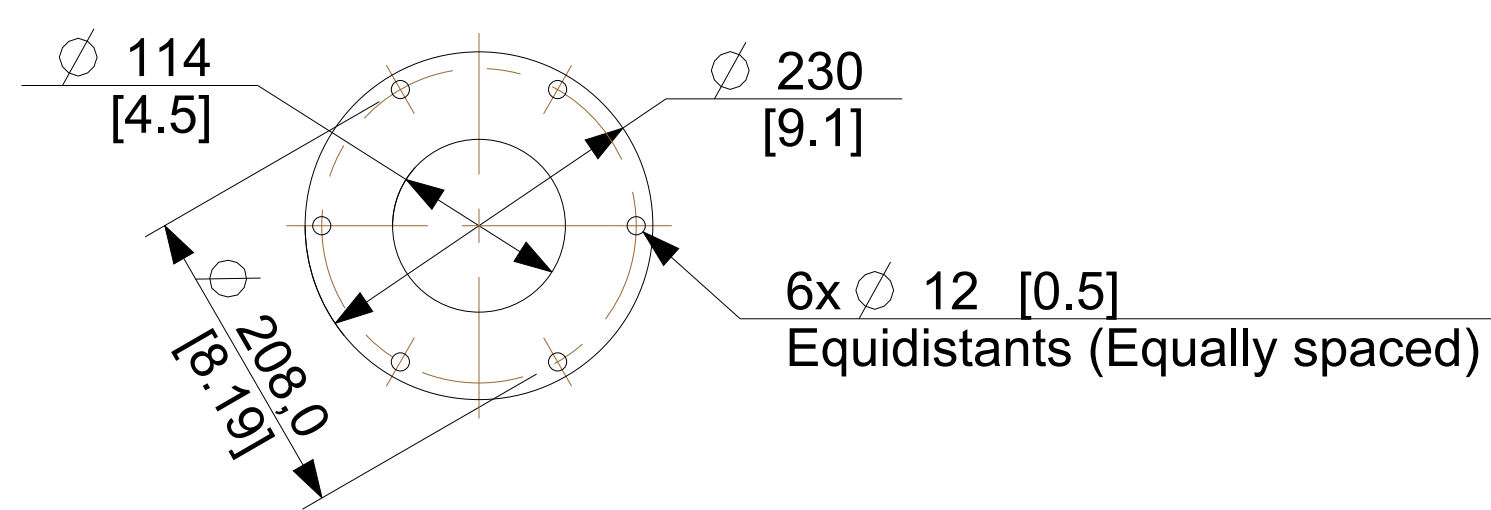
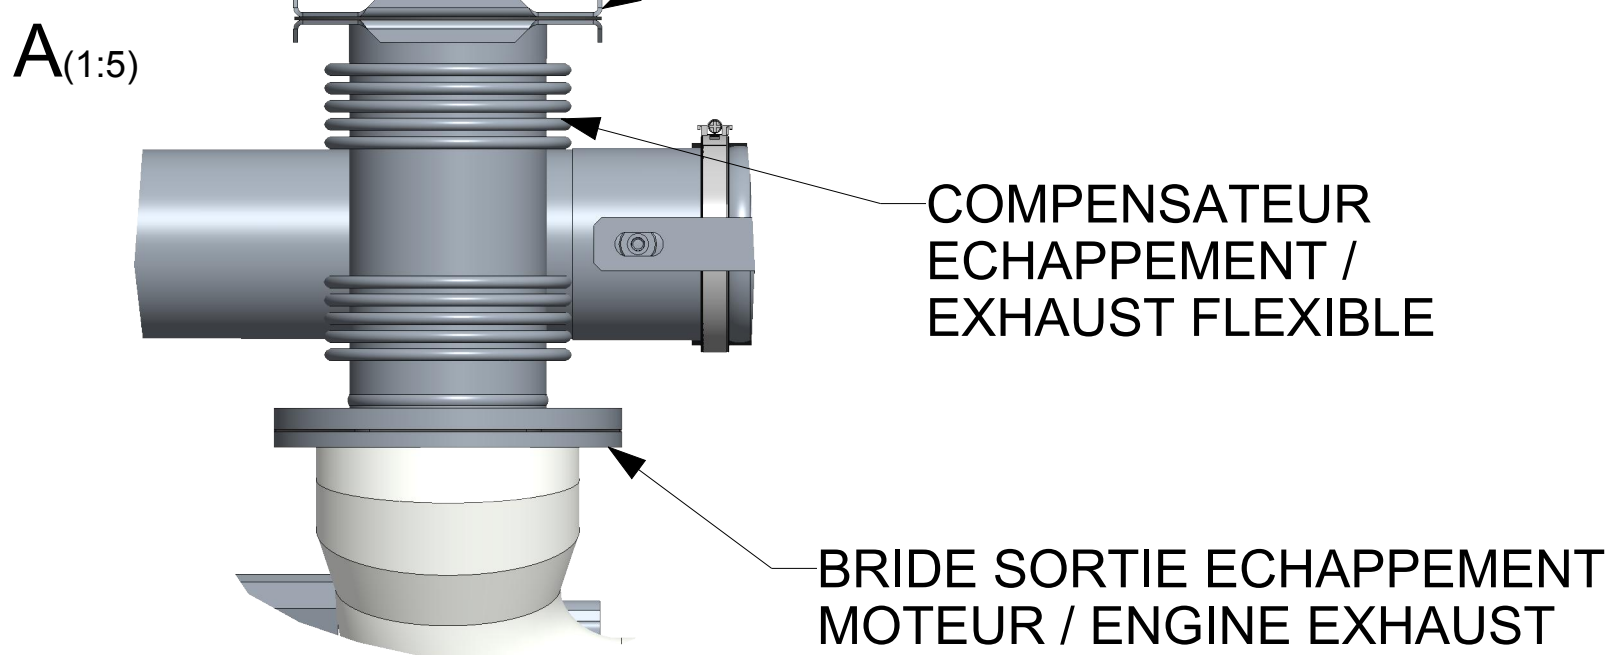
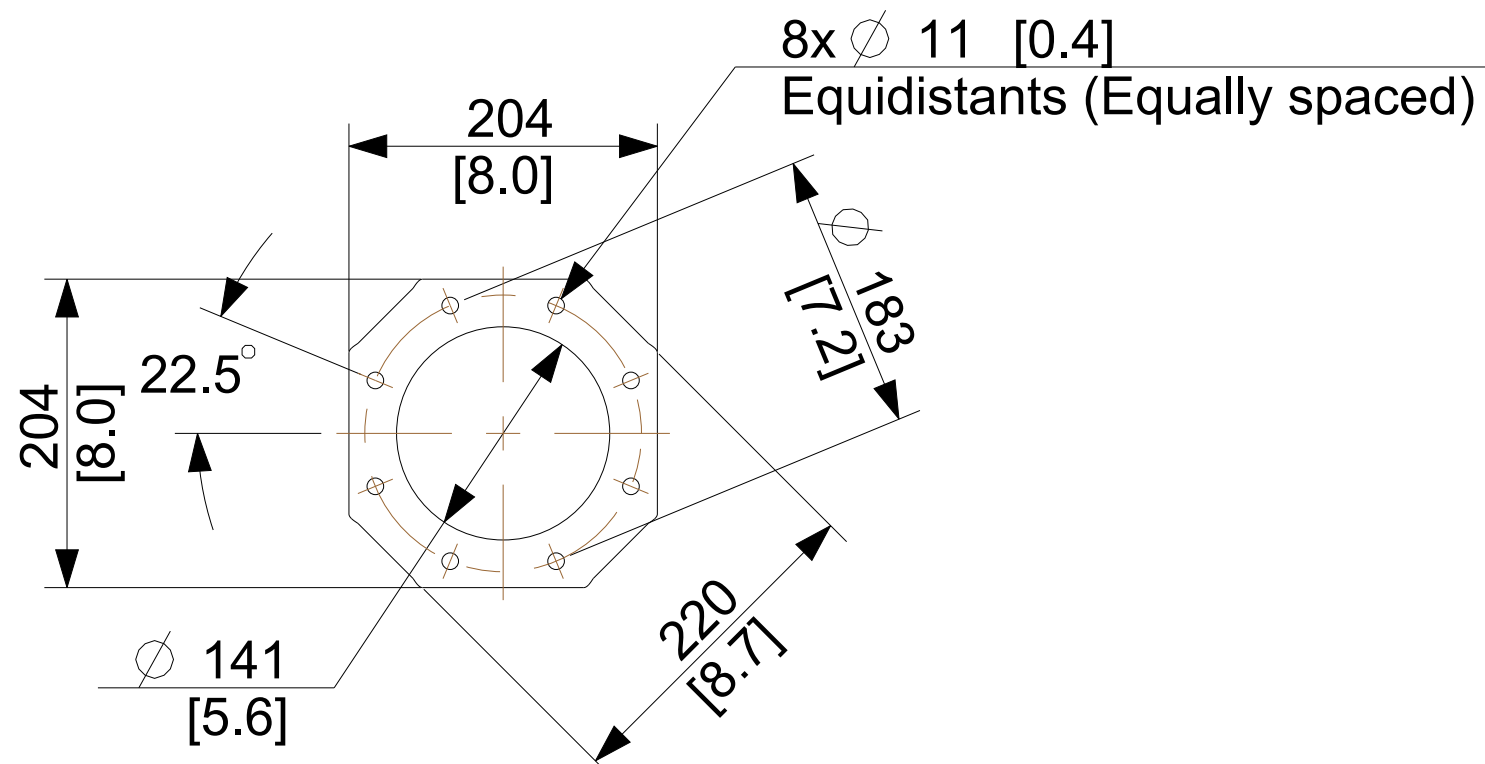
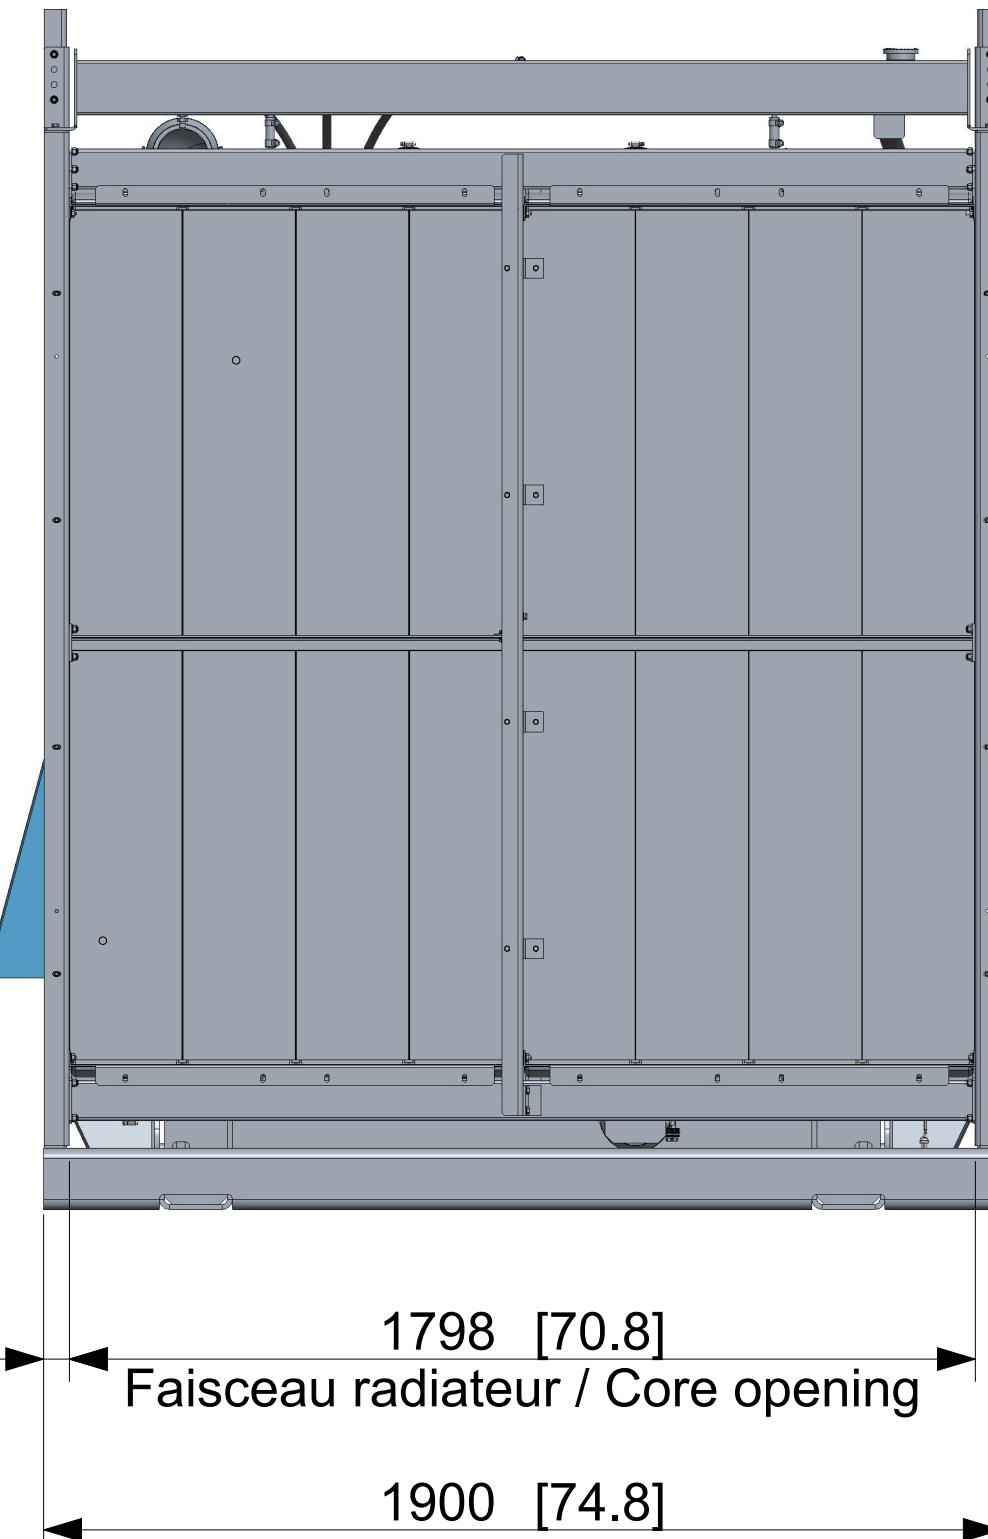
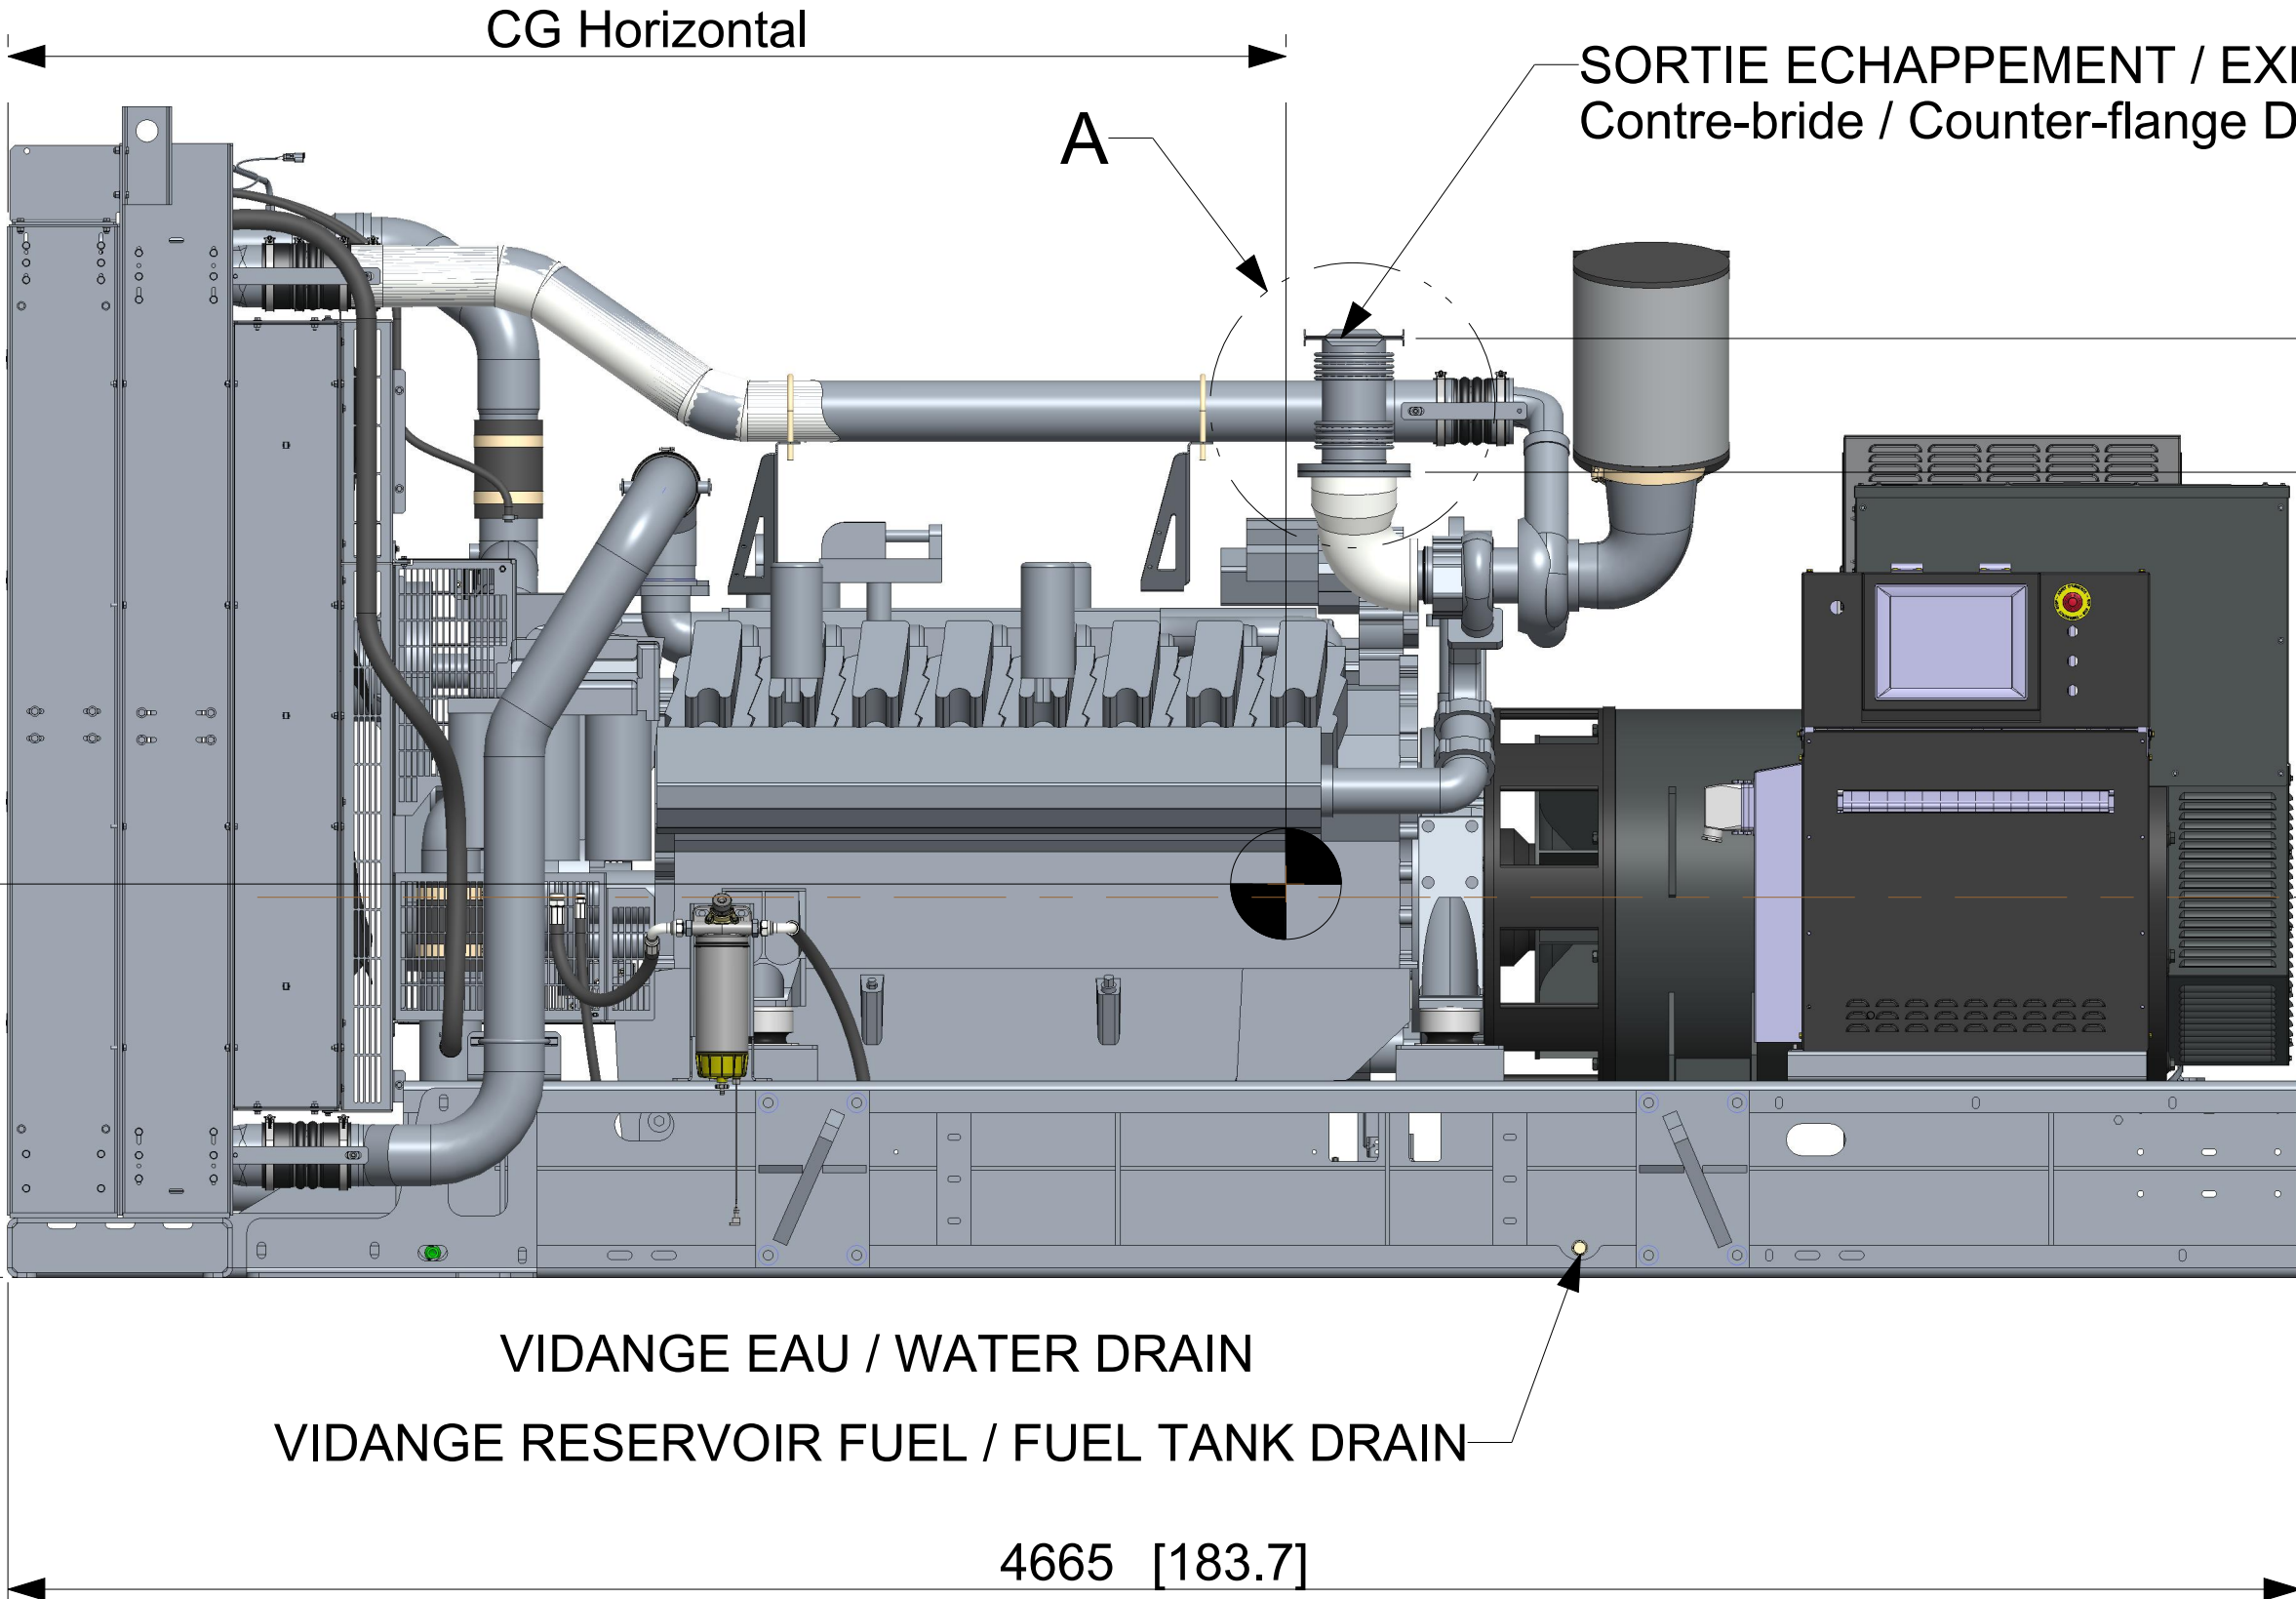


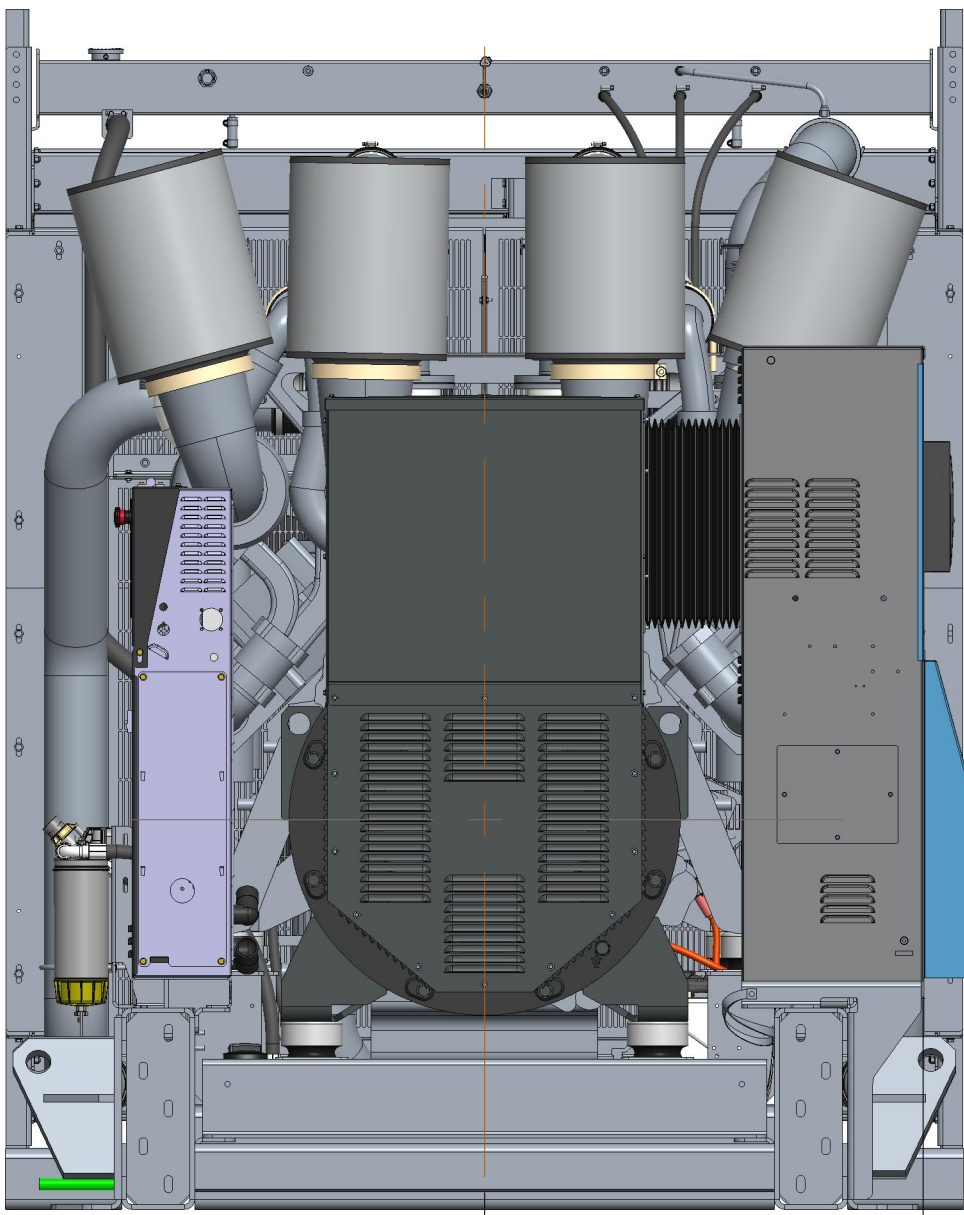

MOTEUR / ENGINE FREQUENCY / FREQUENCY	ALTERNATEUR / ALTERNATOR	L1 (mm / inch)	H1 (mm / inch)	SANS RESERVOIR GASOIL / WITHOUT FUEL TANK								AVEC RESERVOIR GASOIL / WITH FUEL TANK							
				MASSE / WEIGHT (kg / lbs) +/- 5%		COG (mm / inch) A vide / Dry		COG (mm / inch) OdM / Wet		MASSE / WEIGHT (kg / lbs) +/- 5%		COG (mm / inch) A vide / Dry		COG (mm / inch) OdM / Wet					
				A vide / Dry	OdM / Wet	CG Horizontal	CG Vertical	CG Horizontal	CG Vertical	A vide / Dry	OdM / Wet	CG Horizontal	CG Vertical	CG Horizontal	CG Vertical				
KD36V16 50Hz	KH04070T	3650 / 143.70	458 / 18.03	8200 / 18078	8600 / 18960	2606 / 102.59	816 / 32.12	2550 / 100.39	817 / 32.16	8300 / 18298	9100 / 20062	2596 / 102.20	803 / 31.61	2521 / 99.25	773 / 30.43				
	KH04830T	3768 / 148.34	458 / 18.03	8400 / 18519	8800 / 19401	2666 / 104.96	815 / 32.08	2609 / 102.71	816 / 32.12	8600 / 18960	9400 / 20723	2655 / 104.52	802 / 31.57	2578 / 101.49	773 / 30.43				
	KH05520T	3768 / 148.34	458 / 18.03	8700 / 19180	9100 / 20062	2722 / 107.16	813 / 32.00	2665 / 104.92	814 / 32.04	8900 / 19621	9700 / 21385	2711 / 106.73	801 / 31.53	2631 / 103.58	773 / 30.43				
	KH03850T	3650 / 143.70	555 / 21.85	8800 / 19401	9200 / 20283	2678 / 105.43	815 / 32.08	2623 / 103.26	816 / 32.12	8900 / 19621	9700 / 21385	2668 / 105.03	803 / 31.61	2592 / 102.04	775 / 30.51				

Ce plan vous est remis à titre indicatif et peut être révisé sans préavis.
This drawing is for informational purposes only and maybe changed whitout notice

[illegible]

OPTIONAL :
FILTRES A AIR AMBIANCE POUSSIEREUSE / HEAVY DUTY AIR FILTERS

DEMONTAGE CARTOUCHE / SERVICE CLEARANCE

4648 [183.0]

535 [21.1]

2657 [104.6]

1139 [44.9]

1061 [41.8]

OPTIONAL :
RACCORDEMENT FUEL RESERVOIR SEPARÉ / SEPARATED TANK FUEL CONNECTION

300 [11.8]

1127 [44.4]

60 [2.4]

OPTIONAL :
RACCORDEMENT FUEL RESERVOIR SEPARÉ /
SEPARATED TANK FUEL CONNECTION
- Aspiration / Inlet 3/4" BSPP
- Retour / Outlet 3/8" BSPP

OPTIONAL: REDUNDANT STARTER

IND B

Ce plan vous est remis à titre indicatif et peut être révisé sans préavis.
This drawing is for informational purposes only and maybe changed whitout notice.

REV	DATE	ON COMPOSITE DWGS, SEE PART NO. FOR REVISION LEVEL	BY	DO NOT SCALE. REFERENCE THE MODEL FOR ALL UNSPECIFIED DIMENSIONS		
-	07.11.17	NEW DRAWING	AC	UNLESS OTHERWISE SPECIFIED -		
A	09.15.17	TABLE UPDATED - FRAME FIXING HOLES ADDED	AC	1) DIMENSIONS ARE IN MILLIMETERS		
B	10.30.18	ADD OPTIONS REDUNDANT STARTER AND CONNECTION FROM ABOVE	BR	2) TOLERANCES ARE: ISO2768-mS		
				FIRST ANGLE PROJECTION	THIS DRAWING IS UNDER PROPERTY OF THE COMPANY. IT CANNOT BE PRINTED, USED OR COMMUNICATED WITHOUT ITS AUTHORIZATION. TITLE: DIMENSION PRINT, KD36V16 CAD NO: 30001513001 SCALE: 1:15 SHEET: 2 of 2 DWG NO: 30001513001 REV: B SIZE: A0	
				APPROVALS		
				DATE		
				CHECKED:		
				APPROVED:		