



| RATINGS 230 V - 50 Hz | | |
|--------------------------------|-----|------|
| Standby | kVA | 11.8 |
| | kWe | 11.8 |
| Data Center / Mission Critical | kVA | 11.8 |
| | kWe | 11.8 |
| Prime | kVA | 10.7 |
| | kWe | 10.7 |

Benefits & features

KOHLER premium quality

- Design offices using the latest technical innovations
- Modern fully certified factories
- A cutting-edge laboratory
- The generating set, its components and a wide range of options have been fully developed, prototype tested, factory built, and production tested

KOHLER premium performances

- Optimized and certified sound levels
- Reliable power, even in extreme conditions
- Optimized fuel consumption
- Compact footprint
- Best quality of electricity, high starting and loading capacity, according to ISO8528-5
- Robust base frames and high-quality enclosures
- Protection of installations and people
- Approved in line with the most stringent standards

Engines

- Premium level engines, in-house or from strong partners
- High power density, small footprint
- Low temperature starting capability
- Long maintenance interval

Alternator

- Provide industry leading motor starting capability
- Made in Europe
- Excitation system to permit sustained overcurrent > 300% In, during 10 sec
- Built with a class H insulation and IP23

Cooling

- A flexible solution using an electrical driven radiator fan
- Designed or optimized by KOHLER
- High temperature and altitude product capacity available

Base frame and enclosure

- High quality steel with enhanced corrosion resistance
- Highly durable QUALICOAT-certified epoxy paint
- Minimum 1000 hours of resistance to salt spray in accordance with ISO12944
- Ergonomic access to allow easy maintenance and connection of the generator
- Robust design optimized for transportation

GENERAL SPECIFICATIONS

| | |
|-----------------------------------|-----------------------|
| Engine brand | KOHLER KDI |
| Alternator commercial brand | KOHLER |
| Voltage (V) | 230 single phase |
| Standard Control Panel | APM303 |
| Consumption @ 100% load ESP (L/h) | 5.3 |
| Consumption @ 100% PRP load (L/h) | 4.9 |
| Type of Cooling | Mechanical driven fan |
| Performance class | G2 |

GENERATOR SETS RATINGS

| Voltage | Standby | | | Data Center / Mission Critical | | Prime | |
|----------|---------|------|------|--------------------------------|------|-------|------|
| | kWe | kVA | Amps | kWe | kVA | kWe | kVA |
| 240 MONO | 11.8 | 11.8 | 49 | 11.8 | 11.8 | 10.7 | 10.7 |
| 230 MONO | 11.8 | 11.8 | 51 | 11.8 | 11.8 | 10.7 | 10.7 |
| 220 MONO | 11.8 | 11.8 | 54 | 11.8 | 11.8 | 10.7 | 10.7 |

DIMENSIONS COMPACT VERSION

| | |
|-------------------|------|
| Length (mm) | 1410 |
| Width (mm) | 720 |
| Height (mm) | 1020 |
| Tank capacity (L) | 50 |
| Dry weight (kg) | 440 |

DIMENSIONS SOUNDPROOFED VERSION

| | |
|---|------|
| Type soundproofing | M126 |
| Length (mm) | 1750 |
| Width (mm) | 775 |
| Height (mm) | 1230 |
| Tank capacity (L) | 50 |
| Dry weight (kg) | 610 |
| Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) | 74 |
| Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) | 61 |

Distributed By:

East Coast Generators Pty Ltd

83 - 89 Westgate Drive,
Altona North, VIC 3025

Phone: 03 9369 8800

E-mail: sales@eastcoastgenerators.com.au
Web: www.eastcoastgenerators.com.au
ABN 14 202 273 633, ACN 006 517 362

Engine

General

| | |
|--|------------|
| Engine brand | KOHLER KDI |
| Engine ref. | KDW1603 |
| Air inlet system | Athmo |
| Cylinders configuration | L |
| Number of cylinders | 3 |
| Displacement (L) | 1.65 |
| Bore (mm) * Stroke (mm) | 88 * 90.4 |
| Compression ratio | 22 : 1 |
| Speed (RPM) | 1500 |
| Maximum stand-by power at rated RPM (kW) | 15.5 |
| Frequency regulation, steady state (%) | +/- 2.5% |
| Injection Type | Indirect |
| Governor type | Mechanical |
| Air cleaner type, models | Dry |

Fuel system

| | |
|------------------------------|----|
| Maximum fuel pump flow (L/h) | 65 |
|------------------------------|----|

Consumption with cooling system

| | |
|-----------------------------------|-----|
| Consumption @ 100% load ESP (L/h) | 5.3 |
| Consumption @ 100% PRP load (L/h) | 4.9 |
| Consumption @ 75% PRP load (L/h) | 3.7 |
| Consumption @ 50% PRP load (L/h) | 2.7 |

Emissions

Lubrication System

| | |
|---|-----|
| Oil system capacity including filters (L) | 4.4 |
| Min. oil pressure (bar) | 1.5 |
| Max. oil pressure (bar) | 10 |
| Oil sump capacity (L) | 3.8 |
| Oil consumption 100% ESP 50Hz (L/h) | 0 |

Air Intake system

| | |
|----------------------------------|-----|
| Max. intake restriction (mm H2O) | 200 |
| Intake air flow (L/s) | 19 |

Exhaust system

| | PRP | ESP |
|-------------------------------------|-----|-----|
| Heat rejection to exhaust (kW) | | 10 |
| Exhaust gas temperature (°C) | | 460 |
| Exhaust gas flow (L/s) | | 46 |
| Max. exhaust back pressure (mm H2O) | 500 | |

Cooling system

| | |
|--|-----------------|
| Radiator & Engine capacity (L) | 5.8 |
| Fan power 50Hz (kW) | 0.9 |
| Fan air flow w/o restriction (m3/s) | 0.85 |
| Available restriction on air flow (mm H2O) | 15 |
| Type of coolant | Glycol-Ethylene |
| Radiated heat to ambient (kW) | 3 |
| Heat rejection to coolant HT (kW) | 16 |
| Max coolant temperature, Shutdown (°C) | 110 |
| Thermostat begin of opening HT (°C) | 80 |
| Thermostat end of opening HT (°C) | |

Distributed By:



HIRE - SALES - SERVICE

East Coast Generators Pty Ltd

83 - 89 Westgate Drive,
Altona North, VIC 3025

Phone: 03 9369 8800

E-mail: sales@eastcoastgenerators.com.au
Web: www.eastcoastgenerators.com.au
ABN 14 202 273 633, ACN 006 517 362

Alternator Specifications

| | |
|---|----------------|
| Alternator commercial brand | KOHLER |
| Alternator ref. | KH00404T |
| Number of pole | 4 |
| Number of bearing | Single Bearing |
| Technology | Brushless |
| Indication of protection | IP23 |
| Insulation class | H |
| Number of wires | 12 |
| Capacity for maintaining short circuit at 3 In for 10 s | Yes |
| AVR Regulation | Yes |
| Coupling | Direct |

Application data


| | |
|---|------|
| Overspeed (rpm) | 2250 |
| Power factor (Cos Phi) | 1 |
| Voltage regulation at established rating (+/- %) | 1.00 |
| Wave form : NEMA=TIF | <45 |
| Wave form : CEI=FHT | <2 |
| Total Harmonic Distortion in no-load DHT (%) | 3,6 |
| Total Harmonic Distortion, on linear load DHT (%) | 2,0 |
| Recovery time (Delta U = 20% transient) (ms) | 200 |

Performance datas

| | |
|--------------------------------------|------|
| Continuous Nominal Rating 40°C (kVA) | 13.5 |
| Unbalanced load acceptance ratio (%) | 100 |

Peak motor starting (kVA) based on x% voltage dip power factor at 0.3

Motor Starting @ P.F. 0,3

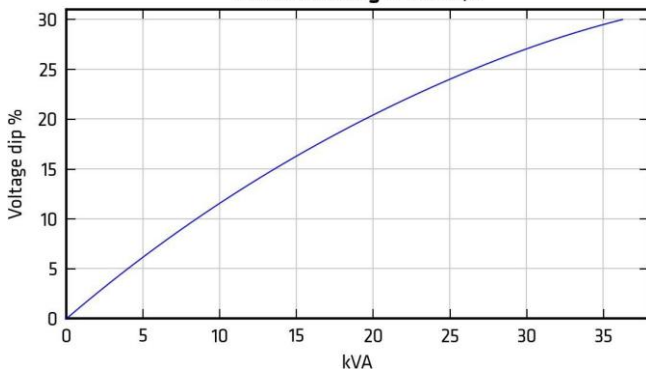

Alternator Standard Features

- All models are brushless, rotating-field alternators
- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting
- The AVR voltage regulator provides superior short circuit capability
- Self-ventilated and dip proof construction
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds
- Superior voltage waveform

Note: See Alternator Data Sheets for alternator application data and ratings, efficiency curves, voltage dip with motor starting curves, and short circuit decrement curves.

Distributed By:



HIRE - SALES - SERVICE

East Coast Generators Pty Ltd

83 - 89 Westgate Drive,
Altona North, VIC 3025

Phone: 03 93698800

E-mail: sales@eastcoastgenerators.com.au

Web: www.eastcoastgenerators.com.au
ABN 14 202 273 633, ACN 006 517 362

Dimensions compact version

| | |
|--|-------------------|
| Length (mm) * Width (mm) * Height (mm) | 1410 * 720 * 1020 |
| Dry weight (kg) | 440 |
| Tank capacity (L) | 50 |

Dimensions soundproofed version**M126**

| | |
|---|-------------------|
| Length (mm) * Width (mm) * Height (mm) | 1750 * 775 * 1230 |
| Dry weight (kg) | 610 |
| Tank capacity (L) | 50 |
| Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) | 74 |
| Measured acoustic power level (Lwa) 50Hz (75% PRP) | 89.75 |
| Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) | 61 |

Dimensions DW compact version

| | |
|--|-------------------|
| Length (mm) * Width (mm) * Height (mm) | 1797 * 775 * 1181 |
| Dry weight (kg) | 590 |
| Tank capacity (L) | 93 |

Dimensions DW soundproofed version**M126 DW**

| | |
|---|-------------------|
| Length (mm) * Width (mm) * Height (mm) | 1797 * 775 * 1391 |
| Dry weight (kg) | 760 |
| Tank capacity (L) | 93 |
| Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) | 74 |
| Measured acoustic power level (Lwa) 50Hz (75% PRP) | 89.75 |
| Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) | 61 |

Distributed By:

**HIRE - SALES - SERVICE****East Coast Generators Pty Ltd**83 - 89 Westgate Drive,
Altona North, VIC 3025

Phone: 03 93698800

E-mail: sales@eastcoastgenerators.com.au

Web: www.eastcoastgenerators.com.au
ABN 14 202 273 633, ACN 006 517 362

Basic terminal block



It is used as a basic terminal block for connecting a control unit. Offers the following functions:

- emergency stop button
- customer connection terminal block
- CE certified

M80



The M80 is a dual-function control panel. It can be used as a basic terminal block for connecting a control unit and as an instrument panel with a direct read facility, with displays giving a global view of your generating set's basic parameters. Offers the following functions:

- Engine parameters: tachometer, working hours counter, coolant temperature indicator, oil pressure indicator
- emergency stop button
- customer connection terminal block
- CE certified

APM303




The APM303 is a versatile unit which can be operated in manual or automatic mode. It offers the following features:

- Measurements: phase-to-neutral and phase-to-phase voltages, fuel level (In option : active power currents, effective power, power factors, Kw/h energy meter, oil pressure and coolant temperature levels)
- Supervision: Modbus RTU communication on RS485
- Reports: (In option : 2 configurable reports)
- Safety features: Overspeed, oil pressure, coolant temperatures, minimum and maximum voltage, minimum and maximum frequency (Maximum active power P<66kVA)
- Traceability: Stack of 12 stored events

For further information, please refer to the data sheet for the APM303

APM403



BASIC GENERATING SET AND POWER PLANT CONTROL

The APM403 is a versatile control unit which allows operation in manual or automatic mode

- Measurements : voltage and current
- kW/kWh/kVA power meters
- Standard specifications: Voltmeter, Frequency meter.
- Optional : Battery ammeter.
- J1939 CAN ECU engine control
- Alarms and faults: Oil pressure, Coolant temperature, Overspeed, Start-up failure, alternator min/max, Emergency stop button.
- Engine parameters: Fuel level, hour counter, battery voltage.
- Optional (standard at 24V): Oil pressure, water temperature.
- Event log/ Management of the last 300 genset events.
- Mains and genset protection
- Clock management
- USB connections, USB Host and PC,
- Communications : RS485 INTERFACE
- ModBUS protocol /SNMP
- Optional : Ethernet, GPRS, remote control, 3G, 4G,
- Websupervisor, SMS, E-mails

Distributed By:



HIRE - SALES - SERVICE

East Coast Generators Pty Ltd

83 - 89 Westgate Drive,
Altona North, VIC 3025

Phone: 03 93698800

E-mail: sales@eastcoastgenerators.com.au

Web: www.eastcoastgenerators.com.au
ABN 14 202 273 633, ACN 006 517 362

STANDARD SCOPE OF SUPPLY

All our gensets are fitted with:

- Industrial water cooled DIESEL engine
- Electric starter & charge alternator
- Standard air filter
- Schneider or ABB electric circuit breaker, adapted to the short-circuit current of the generating set
- Single bearing alternator IP 23 T° rise/ insulation to class H/H
- Welded steel base frame with 85% vibration attenuation mounts
- 4 lifting points on the chassis, lifting bar on the top included from 165 kVA ESP or optional
- highly durable QUALICOAT certified epoxy paint
- frame height optimized to allow it to be moved safely by forklift
- enclosure made of new high-quality European steel with enhanced corrosion resistance
- IP 64 locks, made from stainless materials
- enclosures and base frames tested and analyzed by the French Corrosion Institut
- 100% of tanks tested for permeability
- Personal protection ensured by protective grilles on hot and rotating parts
- Separate 9 dB(A) silencer
- Fuel tank welded inside the genset frame
- Retention bund included for gensets up to 110 kVA ESP
- Charged DC starting battery with electrolyte
- Emergency stop button on the outside
- Flexible fuel lines & lub oil drain cock
- Exhaust outlet with flexible and flanges
- User's manual (1 copy)
- Packing under plastic film
- Delivered with oil and antifreeze liquid

CODES AND STANDARDS

Engine-generators set is designed and manufactured in facilities certified to standards ISO9001:2015 & ISO14001:2015. The generator sets and its components are prototype-tested, factory built and production tested and are in compliance with the relevant standards:

- Machinery Directive 2006/42/EC of May 17th 2006
- EMC Directive 2014/30/UE
- Safety objectives set out in the Low Voltage Directive 2014/35/UE
- EN ISO 8528-13, EN 60034-1, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 55011, EN 1679-1 et EN 60204-1

POWER RATINGS DEFINITION according to ISO8528-1 (2018-02 edition) and ISO-3046-1

Emergency Standby Power (ESP): The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Average load factor per 24 hours of operation is <85%.

Prime Power (PRP): At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour within 12 hour of operation. Average load factor per 24 hours of operation is <75%.

Data Center Power (DCP): Data center power is defined as being the maximum power which a generating set is capable of delivering while supplying a variable or continuous electrical load and during unlimited run hours. Depending on the sites to supply and the availability of reliable utility, the generating set manufacturer is responsible to define what power level is able to supply to fulfil that requirement including hardware or software or maintenance plan adaptation.

Distributed By:



HIRE - SALES - SERVICE

East Coast Generators Pty Ltd

83 - 89 Westgate Drive,
Altona North, VIC 3025

Phone: 03 9369 8800

E-mail: sales@eastcoastgenerators.com.au

Web: www.eastcoastgenerators.com.au
ABN 14 202 273 633, ACN 006 517 362

TERMS OF USE

According to the standard, the nominal power assigned by the genset is given for 25°C Air Inlet Temperature, of a barometric pressure of 100 kPA (100 m A.S.L), and 30% relative humidity. For particular conditions in your installation, refer to the derating table.

WARRANTY INFORMATIONS

Standard Warranty Period:

- for Products in "back-up" service
 - o 30 months from the date the Product leaves the plant
 - o 24 months from the Product's commissioning date
 - o 1,000 running hours

The warranty expires when one of the above conditions is met.

- for Products in "prime" or "continuous" service (continuous supply of electricity, either in the absence of any normal electricity grid or to complement the grid),
 - o 18 months from the date the Product leaves the plant
 - o 12 months from the Product's commissioning date
 - o 2,500 running hours

The warranty expires when one of the above conditions is met.

For more details regarding conditions of application and scope of the warranty please refer to our General "terms & conditions of sales".

Reference Conditions: 25°C Air Inlet Temperature, 40°C Fuel Inlet Temperature, 100 kPa Barometric Pressure; 10.7 g/kg of dry air Humidity. Intake Restriction set to maximum allowable limit for clean filter; Exhaust Back pressure set to maximum allowable limit.

Data was taken from a single engine test according to the test methods, fuel specification and reference conditions stated above and is subjected to instrumentation and engine-to-engine variability. Test conducted with alternate test methods, instrumentation, fuel or reference conditions can yield different results. Data and specifications subject to change without notice.

Distributed By:



HIRE - SALES - SERVICE

East Coast Generators Pty Ltd

83 - 89 Westgate Drive,
Altona North, VIC 3025

Phone: 03 93698800

E-mail: sales@eastcoastgenerators.com.au

Web: www.eastcoastgenerators.com.au
ABN 14 202 273 633, ACN 006 517 362